

Océ VarioPrint 6250

System data



The world's fastest duplex printer

Introducing Océ Gemini Instant Duplex technology

Introducing the first cutsheet printer to feature new Océ Gemini Instant Duplex technology. By simultaneously printing both sides of a document while maintaining 100% accurate registration and offset-like quality, Océ has raised the benchmark for high volume cutsheet printing. Simply the fastest duplex printer ever.

General

- The world's fastest cut sheet duplex printer
- Océ Gemini Instant Duplex Printing technology
- Advanced Active Registration technology
- Sophisticated media handling from 12 paper trays
- Paper Logic—perfect sense with perfect prints
- Intuitive user interface helps ensure that every hour is productive
- Increased throughput lets you handle more business

Technology

Printer type

- LED, 1200dpi, 141 lpi

Engine technology

- Océ Gemini Instant Duplex technology delivers simultaneous duplex printing

Production

Environment

Suitable from 600,000 up to 8,000,000 prints per month

Print speed

- 250 A4/Letter prints per minute
- 132 A3/Ledger prints per minute
- Print speed independent of media type

User interface

Type

Intuitive touch screen user interface

Main views

- queue manager
- job scheduler
- tray manager
- status overview



Océ VarioPrint 6250 system data

Paper Input Module

Functionality:

- Standard unit with 4 trays, capacity: 4.600 sheets.
- Paper tray capacity
 - 2 x 600 sheets 80 g/m² plain paper each tray
 - 2 x 1700 sheets 80 g/m² plain paper each tray
- Maximum configuration 3 Paper Input Modules: 12 trays with a total capacity of 13.800 sheets
- Sizes width: 203 - 320 mm
- Length: 203 - 488 mm
- All sizes between 203 x 203 and 320 x 488 mm (from all trays)

Paper weight

- From 60 - 200 g/m²
- 50 - 300 g/m² on Océ recommended media

High Capacity Stacker

Functionality:

- capacity 6000 sheets - 80 g/m²
- All sizes between 203 x 203 and 320 x 488mm
- Including tabs support
- OEM output to third party finishing solutions

Set Finisher (optional)

Finisher (stacker/stapler)

- Capacity 4000 sheets A4/letter 80g/m²

Sizes

The following paper sizes can be stacked (and stapled) - all (custom) sizes between:

- long edge: 275-306 mm
- short edge: 208-220 mm
- Number of staples in a set: 1 or 2 position staple
- Stapling positions: portrait, landscape, book
- Stapling capacity: 100 sheets plain paper (80 g/m²)

Connectivity

Network hardware

- 10/100 Mb, 1Gb ethernet

Network protocols

- TCP/IP
- SMB

Higher level protocols

- LPR/LPD for print job submission
- Socket printing
- SNMP
 - Host Resources
 - MIBII
 - Printer MIB


Supported PDLs (supported automatic language sensing)

- PostScript 3 (streaming behaviour)
- PDF
- PCL 5e



Océ VarioPrint 6250 system data

Sizes and weights

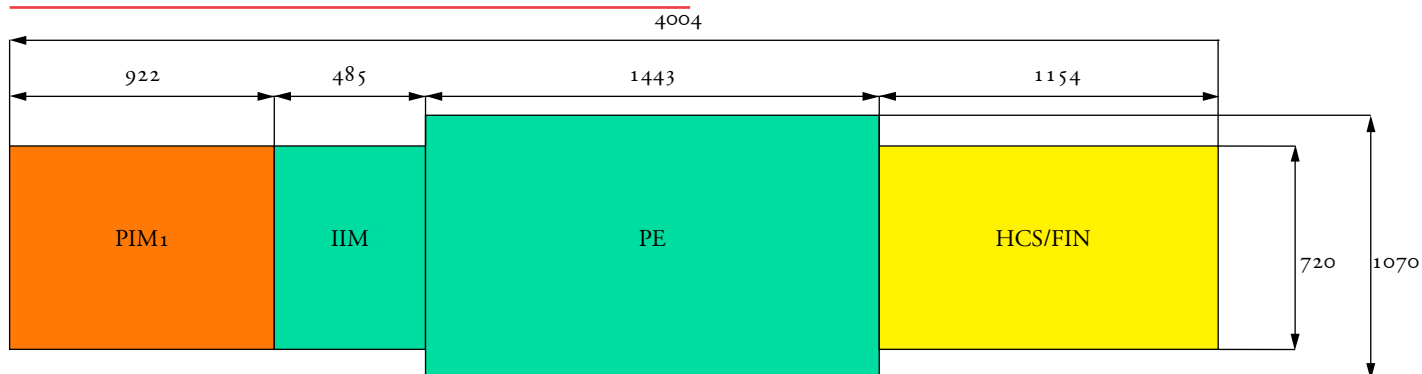

Sizes and Weights:				
	Weight Kg	Length mm	Width mm	Heights mm
Print Engine (PE)	680	1443	1070	1204
Paper Input Module (PIM)	180	718	922	1150
Input Interface Module (IIM)	102	485	720	1140
High Capacity Stacker including finisher (HCS/FIN)	290	1154	716	1928
High Capacity Stacker (HCS)	160	1154	716	1169

Noise level

- Standby 61 dB
- Running 78 dB

Power consumption stand-by:

1 KW

Power consumption in running mode:

- At 80 g/m² paper weight 5 KW
- Additional in / or output modules +/- 100W

For information and services, visit us at www.oce.com



Printing for
Professionals

© 2006 Océ. Illustrations and specifications do not necessarily apply to products and services offered in each local market. Technical specifications are subject to change without prior notice. All other trademarks are the property of their respective owners.